

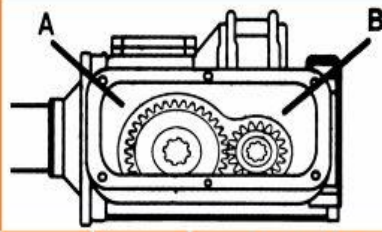
Robust Multi Speed

FIELDKING



Robust Multi Speed

FIELDKING

DESCRIPTION	FKDRTMG-125	FKDRTMG-150	FKDRTMG-175	FKDRTMG-200	FKDRTMG-225	FKDRTMG-250	FKDRTMG-275	P.T.O RPM 				
Tillage Width (cm / inch)	125 / 49"	150 / 59"	175 / 69"	200 / 79"	225 / 89"	250 / 98"	275 / 108"					
Gearbox	Multi (4 Speed)											
Side Transmission	Gear Drive											
Type of Blades	L/ C/ J											
No. of Flanges	5/ 5/ 8	6/ 6/ 10	7/ 7/ 12	8/ 8/ 14	9/ 9/ 16	10/ 10/ 18	11/ 11/ 20					
No. of Blades 	30/ 30/ 48	36/ 36/ 60	42/ 42/ 72	48/ 48/ 84	54/ 54/ 96	60/ 60/ 108	66/ 66/ 120					
Gearbox Overload Protection	Shear Bolt / Slip Clutch											
Weight (Kg./Lbs Approx.) 	450 / 992	480 / 1058	510 / 1124	540 / 1190	570 / 1257	600 / 1322	630 / 1388					
Tractor Power (HP) 	35-40	40-45	45-50	50-60	60-70	70-80	80-90					
								A B ROTOR R.P.M (C/D) 18:33:28 / 19:33:25				
								540	20	16	156 / 183	
									16	20	243 / 287	
									17	19	217 / 256	
									19	17	174 / 205	
									21	15	139 / 164	
									15	21	272 / 322	
									18	18	194 / 230	
								1000	22	14	229 / 270	

*Rotor r.p.m with individual gear drive denoted by C/D represents 18:33:28 / 19:33:25 respectively.