

ROTAVATOR

ALPHA



SALIENT FEATURES

- International quality boron steel blades
- High tensile fasteners
- Flexible spring damper assembly
- Heavy duty gear box
- ÿ Powder coated paint
- ÿ Ensures smooth operation in different soil types
- ÿ Provides ease of working in interculture operations
- ÿ Effective for puddling due to better churning of soil

ALPHA SERIES

Rotavator is secondary tool used in preparing Seed Beds, Stubby ploughing in specially farming vineyard gardens.

TECHNICAL SPECIFICATIONS

	 Model Name	 Length (mm)	 Width (mm)	 Height (mm)	 Size (In Feet)	 Tillage Width (mm)	 Gear Box	 Side Transmission	 Type of Blade	 No of Blades	 No. of Flange's	 Weight (Kg. Approx)	 Tractor Power (HP)
ALPHA Series	SL AS5	1802	895	1104	5	1625	Multi Speed	Gear Drive	C & L Type	36	7	430	45-55
	SL AS5.5	1975			5.5	1800				36	7	445	50-60
	SL AS6	2054			6	1880				42	8	460	60-70
	SL AS7	2305			7	2130				48	9	490	70-80
	SL AS8	2510			8	2335				54	10	545	75-85
	SL AS9	2995			9	2820				60	11	580	70-80
	SL AS10	3215			10	3040				66	12	650	80-90



HEAVY DUTY
2 SPEED
GEARBOX




DUO CONE MECHANICAL
SEAL SUITABLE FOR
DRY & WET LANDS



OIL IMMERSSED
SIDE BEARINGS



HEAVY DUTY BODY
STRUCTURE WITH
7 MM THICK BLADE

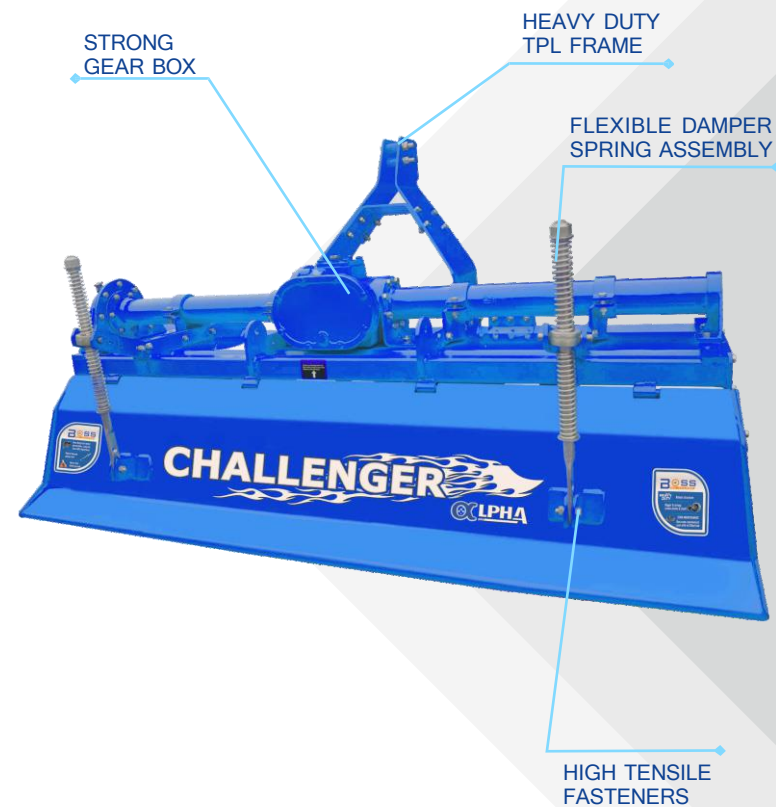

SONALIKA

Auth. Dealer